

R84G - Pressure regulators Excelon® Plus Modular System

- Port size: 3/8" ... 3/4" (ISO G/PTF)
- Excelon® Plus design allows in-line installation or modular installation with other Excelon® Plus products
- Push to lock adjusting knob with built in tamper resistant feature
- Easy to read flush mounted gauge as standard, integrated electronic pressure sensor as option
- High Corrosion resistance: Metal body with electrophoretic paint finish
- Relieving and Non-relieving options
-  DoC in accordance with 2014/34/EU/ATEX



Technical features pressure regulator

Medium:

Compressed air only

Maximum supply pressure:

20 bar (290 psi)

Outlet pressure ranges:

0,3 ... 10 bar (4 ... 145 psi),
0,3 ... 4 bar (4 ... 58 psi) optional,
0,3 ... 7 bar (4 ... 101 psi) optional,
0,7 ... 17 bar (10 ... 247 psi) optional

Gauge:

Integrated as standard
Gauge port 1/8 or electronic pressure sensor as option

Port size:

G3/8, G1/2, G3/4,
3/8 PTF, 1/2 PTF, 3/4 PTF

Diaphragm Type:

Relieving and Non-relieving

Flow:

125 dm³/s at port size: 1/2",
inlet pressure 10 bar (145 psi),
6,3 bar (91 psi) set pressure and a Δp: 1 bar (14,5 psi) droop from set.

Ambient/Media temperature:

-20 ... +65°C (-4 ... +149°F)

Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F)

Materials:

Body: Die cast aluminium
Body covers: ABS
Bonnet: POM/Aluminium
Valve: PP with Geolast seals
Elastomers: NBR

Atex:

Regulators R84 are in conformity with Atex 2014/34/EU

 II 2 GD
Ex h IIC T6 Gb
Ex h IIIC T85°C Db

excluding all versions with electronic pressure sensor

Technical data R84G - standard models with integrated flush mounted gauge

Symbol	Port size	Pressure range (bar)	Adjustment	Integrated gauge (bar)	Weight (kg)	Model*)
	G3/8	0,3 ... 10	Knob	0 ... 10	0,59	R84G-3GK-RMG
	G1/2	0,3 ... 10	Knob	0 ... 10	0,59	R84G-4GK-RMG
	G3/4	0,3 ... 10	Knob	0 ... 10	0,59	R84G-6GK-RMG

*) All models shown here are supplied with integrated gauge applicable for flow direction left to right.

With flow direction right to left please use the online configurator www.norgren.com/en/support/configurators/air-preparation-configurator or contact Norgren

R84G - Pressure regulators with integrated electronic pressure sensor

- > Electronic monitoring of secondary pressure
- > 1.44" full colour graphic display. Excellent Visual Management.
- > Parameter Adjustment via front screen Buttons or Accessed Via IO-Link
- > Configurable switching output
- > Adjustable settings:
 - Setpoint,
 - Tolerance,
 - Hysteresis,
 - Pressure Units,
 - Temperature Units,
 - Screen Orientation,
 - Digital Output Type (NPN, PNP, Push-Pull),
 - Digital Output State (Normally High, Normally Low)
- > Install as a standard electronic pressure sensor or a pressure transducer with IO-Link



 **IO-Link**

Technical features electronic pressure sensor

Electrical parameters

Secondary pressure measurement range:	Accuracy:	Display:	IO-Link function:
0 ... 10 bar (0 ... 145 psi, 0 ... 1.0 MPa)	≤ 1.5% of full scale (FS) of detected pressure (0 ... +50°C, +32 ... +122°F)	1.44" full colour TFT LCD Text / background colours: white/green: pressure in range white/red: pressure out of range white/amber: error black white: setting mode	Pressure information Pressure out of range warnings Temperature diagnostic Supply voltage diagnostic Operating time diagnostic Min. cycle time: 20 ms
Repeatability:	Units:	Display fields:	
≤ 0.1% of full scale (FS) at stable temperature	Pressure: bar, psi, MPa Temperature: °C, °F Voltage: V	User configurable identifier, pressure value, pressure units, user configurable message, menu	

For product IODD file please use the online link <http://s.norgren.com/digital-gauge-iodd>
for a copy of the Quick Start Guide or comprehensive Operators manual please use the following online link www.norgren.com/excelon-plus

Electrical connection M8 x 1

Pin-No.	Signal	Cable
1	L+ (24V)	brown
2	Out 2 (switching)	white
3	L- (0V)	blue
4	C/Q (IO-Link)	black

Electrical connection:

M8 x 1

Power supply:

18 ... 30 V d.c.

Current consumption:

20 mA

Electromagnetic compatibility:

According to EN 61000-6-2;
EN 61000-6-3




Switching output:

Configurable NPN / PNP / Push-Pull / NO / NC / hi-Z

Load current:

100mA with short circuit protection

Technical data R84G - standard models

Symbol	Port size	Pressure range (bar)	Adjustment	Integrated gauge (bar)	Weight (kg)	Model*)
	G3/8	0,3 ... 10	Knob	0 ... 10	0,79	R84G-3GK-RME
	G1/2	0,3 ... 10	Knob	0 ... 10	0,79	R84G-4GK-RME
	G3/4	0,3 ... 10	Knob	0 ... 10	0,79	R84G-6GK-RME

*) All models shown here are supplied with integrated pressure sensor applicable for flow direction left to right.

With flow direction right to left please use the online configurator www.norgren.com/en/support/configurators/air-preparation-configurator or contact Norgren

Option selector *1
R84G-★★★-★★★

Port size	Substitute	Gauge	Substitute
3/8"	3	With integrated digital pressure sensor *2)	E
1/2"	4	With (fitted integrated gauge)	G
3/4"	6	Without integrated gauge but with gauge port 1/8"	N
Thread form	Substitute	Pressure range *3)	Substitute
PTF	A	0,3 ... 4 bar	F
ISO G parallel (standard)	G	0,3 ... 7 bar	K
PTF (R to L)	J	0,3 ... 10 bar (standard)	M
ISO G parallel (R to L)	L	0,7 ... 17 bar	S*2)
Adjustment	Substitute	Diaphragm Type	Substitute
Knob (standard)	K	Relieving	R
T-bar	T*2)	Non-relieving	N
Knob (down)	U		
T-bar (down)	Y		

*1) All models shown here are applicable for flow direction left to right.

With flow direction right to left please use the online configurator www.norgren.com/en/support/configurators/air-preparation-configurator or contact Norgren

*2) Units with 17 bar outlet pressure range are available only with the T-bar adjustment. Not available in connection with integrated pressure sensor.

*3) Outlet pressure can be adjusted to pressures in excess of, and less than, those specified. Do not use these units to control pressures outside of the specified ranges.

Excelon® Plus adheres to the following harmonised standard and technical specifications:

2014/34/EU Equipment and protective systems intended for use in potentially explosive atmospheres.

The following harmonised standards and technical specifications have been applied ISO 4414:2010 – Pneumatic fluid power – General rules and safety requirements for systems and their components; ISO 80079-36:2016 – Explosive atmospheres – Part 36: Non-electrical equipment for explosive atmospheres – Basic method and requirements; ISO 80079-37:2016 – Explosive atmospheres

Part 37: Non-electrical equipment for explosive atmospheres – Non-electrical type of protection constructional safety "c", control of ignition sources "b", liquid immersion "k".




Ex h IIC T6 Gb
Ex h IIIC T85°C Db
ATEX Certification No.: NORGREN 18.0001X


For a copy of the Declaration of Conformity (DoC) please use the link http://cdn.norgren.com/pdf/IM_Excelon_Plus_EN_final.pdf

Flow characteristics


Inlet pressure: 10 bar (145 psi),
 Outlet pressure range: 0,3 ... 10 bar (4 ... 145 psi)
 Port size: 1/2"

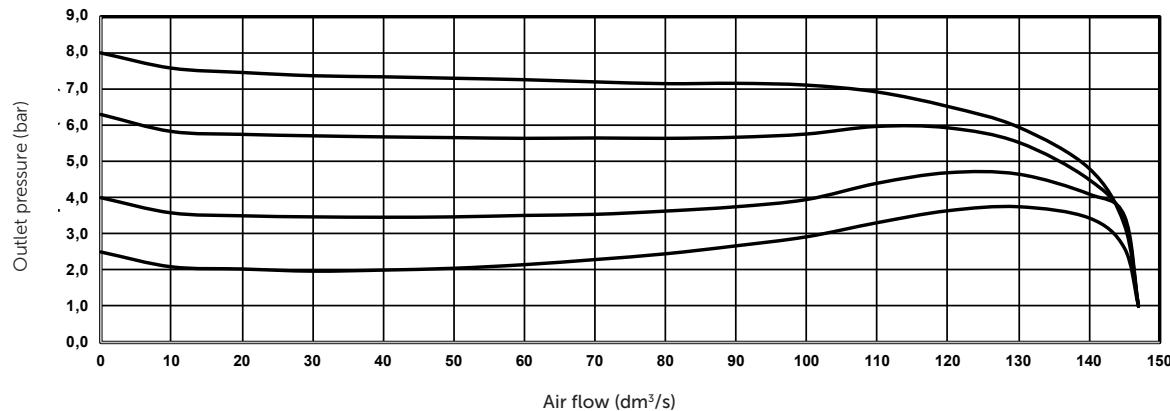

Inlet pressure: 10 bar (145 psi),
 Outlet pressure range: 0,3 ... 7 bar (4 ... 101 psi)
 Port size: 1/2"

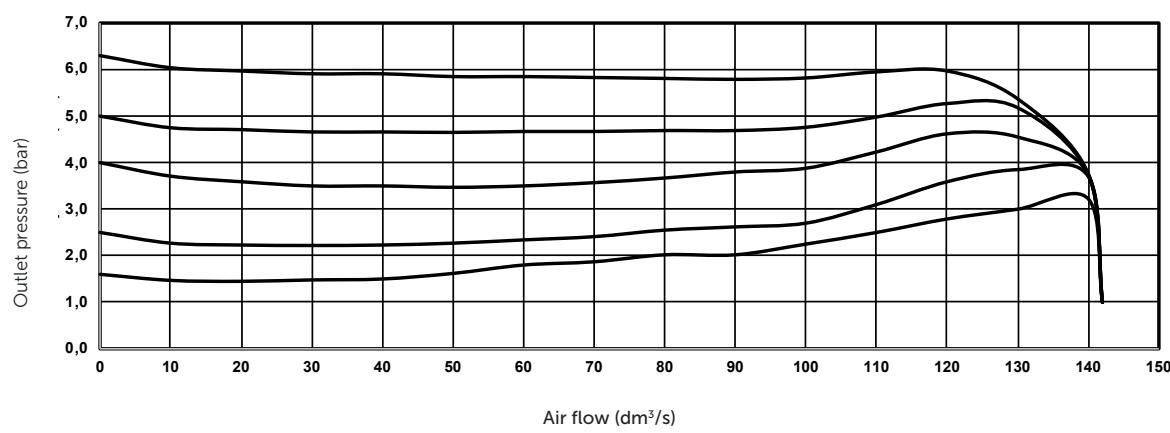

Inlet pressure: 10 bar (145 psi),
 Outlet pressure range: 0,3 ... 4 bar (4 ... 58 psi)
 Port size: 1/2"

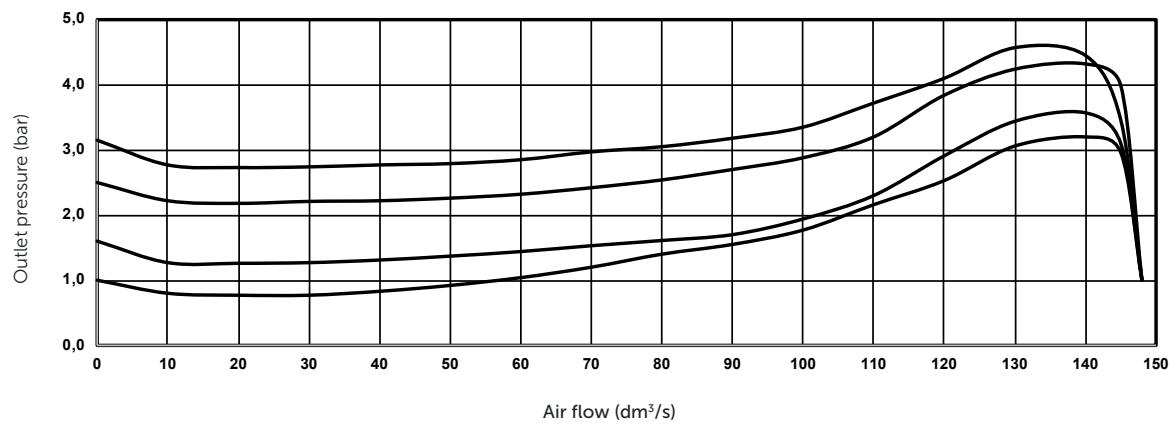

Accessories

Quikclamp®



Page 9

840014-51KIT

Quikclamp® with bracket assembled



Page 9

840014-52KIT

Hybrid Quikclamp® *1



Page 9

840014-61

Hybrid Quikclamp® with bracket assembled *1



Page 9

840014-62

*1) To connect new Excelon® Plus to old Excelon® 74/73 units.
Having the same hole centres as 74 series mounting bracket.

A Quikclamp® adds 13.6 mm to the overall width of a combination unit

Neck mounting bracket and plastic panel nut



Page 9

840068-51KIT

Plastic panel mounting nut



Page 9

840048-89KIT

Neck mounting bracket and metal panel nut



Page 9

840068-50KIT

Metal panel mounting nut



Page 9

840048-01KIT

Mounting bracket



Page 10

840024-50KIT

Integrated gauge
4 bar gauge



840073-03KIT

Integrated gauge
10 bar gauge



840073-01KIT

Integrated gauge
20 bar gauge



840073-02KIT

Gauge adaptor kit
1/8 PTF



840143-01KIT

Gauge adaptor kit
R 1/8



840143-02KIT

Full flow porting block
horizontal, 3/4 PTF



Page 10

840028-50KIT

Full flow porting block
horizontal, G3/4



Page 10

840028-53KIT

Full flow porting block
vertical, 3/4" PTF



Page 10

840028-68KIT

Full flow porting block
vertical, G3/4"



Page 10

840028-69KIT

Pressure switch interface block
(18D pressure switch) G1/4



Page 10

0337717000000000

Pressure sensing block
1/4 PTF



Page 10

840016-50KIT

Pressure sensing block
G1/4



Page 10

840016-51KIT

Port Adaptors



Page 10

1/4 PTF 840015-01KIT

3/8 PTF 840015-02KIT

1/2 PTF 840015-03KIT

3/4 PTF 840015-04KIT

G1/4 840015-09KIT

G3/8 840015-10KIT

G1/2 840015-11KIT

G3/4 840015-12KIT

Padlock



840055-01KIT

Lockout device



840055-02KIT



*1) Flanged version. For other pressure ranges, please see data sheet 5.11.001

*2) For other pressure ranges, please see data sheet 5.11.385

*3) Q84G stand alone electronic pressure sensor module
see <http://s.norgren.com/digital-gauge-iodd> for data-sheet 8.900.905.

IO-Link cables

Connection cable M8x1 for integrated electronic pressure sensor



Description	Cable length (m)	Model
	0,6	NC-084FS-124MS-A
M8 female to M12 male	1,0	NC-084FS-124MS-1
	2,0	NC-084FS-124MS-2
	5,0	NC-084FS-124MS-5
M8 female to free end	5,0	NC-084FS-00000-5

Gauges

(For regulators with gauge port instead of integrated port)

Center back connection, white face
(for full technical specification see datasheet 8.900.900)



Pressure range (bar)*3) (MPa)	(psi)	Ø	Thread size	Model
0 ... 6	0 ... 0,6	0 ... 84	50 mm	R1/8
0 ... 10	0 ... 1	0 ... 145	50 mm	R1/8
0 ... 25	0 ... 2,5	0 ... 362	50 mm	R1/8

*3) primary scale

R84 / B84
Elastomer kit,
relieving



FRLB84-KIT






R84 / B84
Elastomer kit,
Non-relieving



FRLB84NR-KIT

Dimensions

Dimensions in mm
Projection/First angle

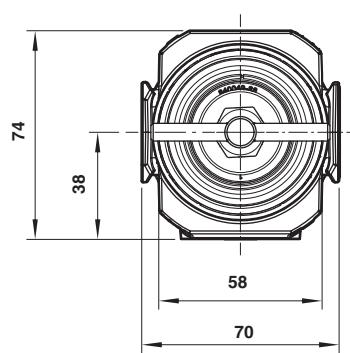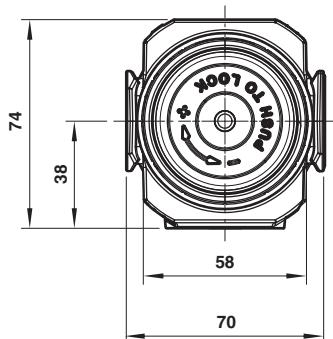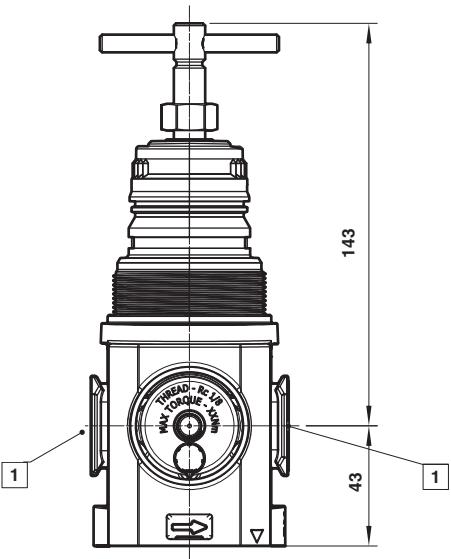
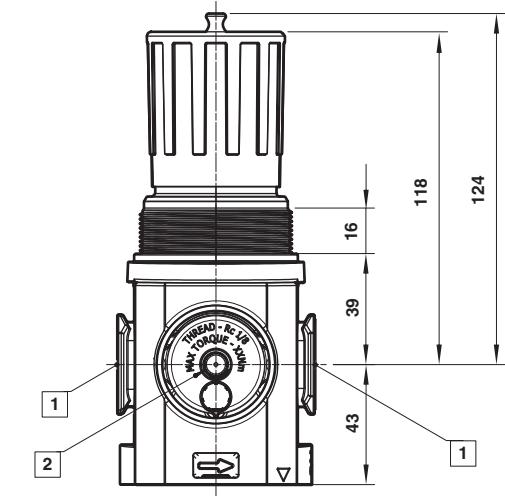


[1] Main ports 3/8", 1/2" or 3/4" (ISO G/PTF)
[2] Gauge Port Rc 1/8 for ISO G and
1/8 PTF for PTF main ports

Dimensions

R84G - General Purpose Regulator


Dimensions in mm
Projection/First angle

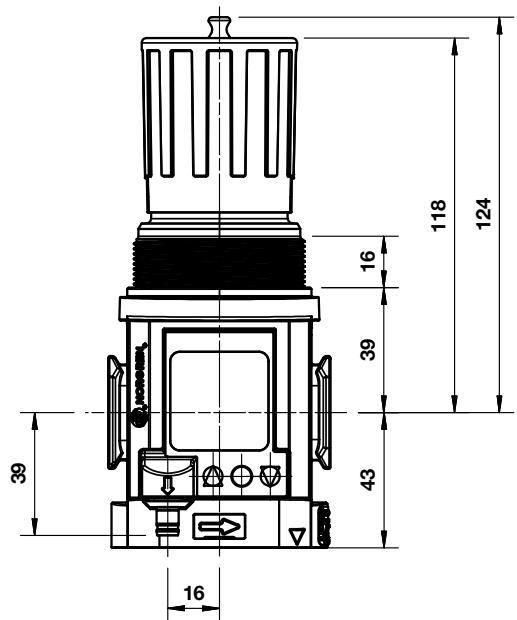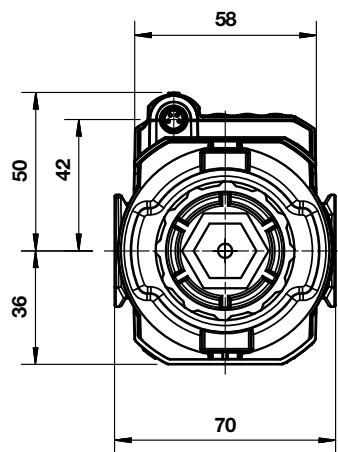


Accessories

Dimensions in mm
Projection/First angle


Quikclamp® with wall bracket

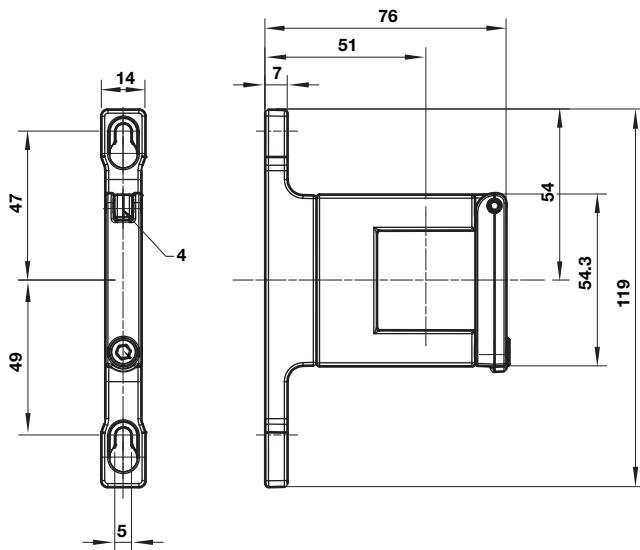


Quikclamp®

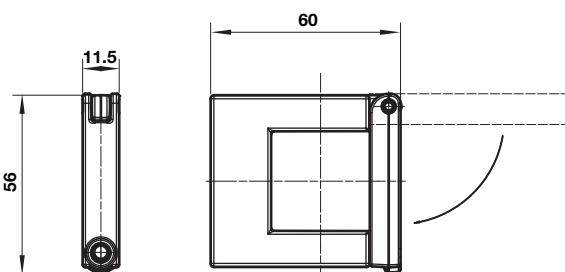


Hybrid - Quikclamp® with wall bracket

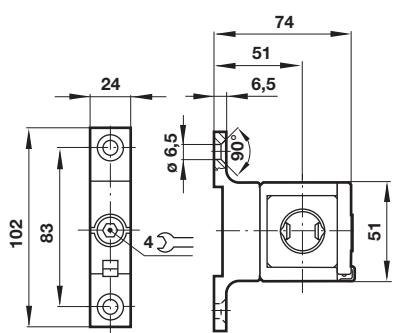



Hybrid - Quikclamp®

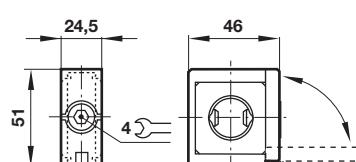


Panel mounting nut

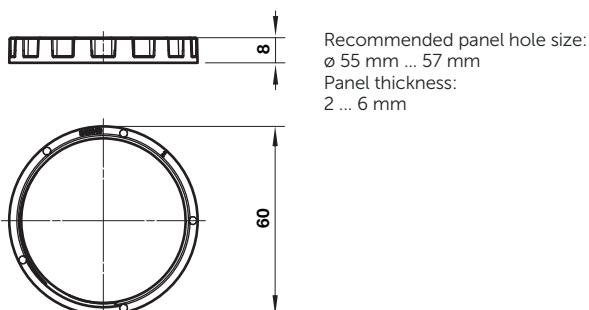


Neck mounting bracket

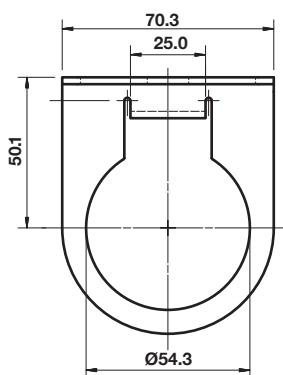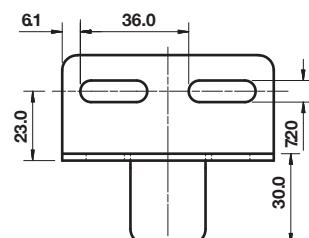


Mounting bracket

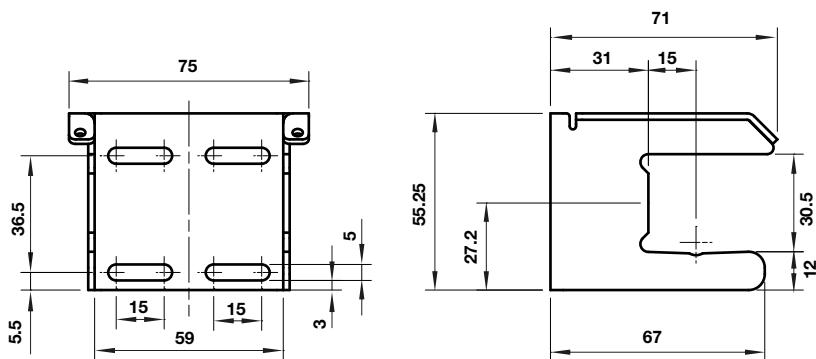


Dimensions in mm
Projection/First angle




Pressure sensing block

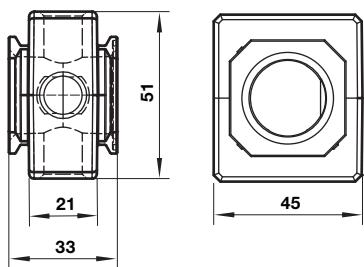


Pipe adaptor

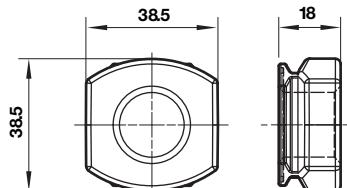


Full flow porting block horizontal

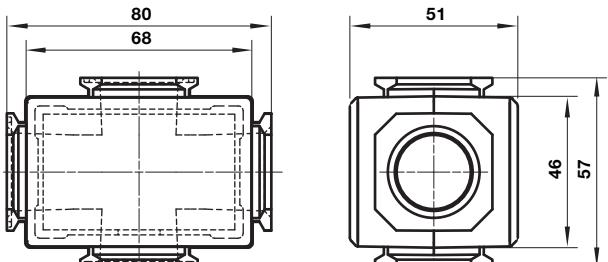


Full flow porting block vertical

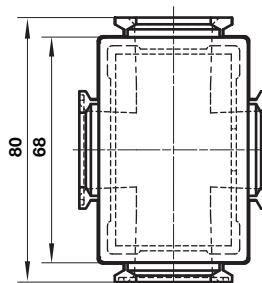

Porting block for
18D pressure switch

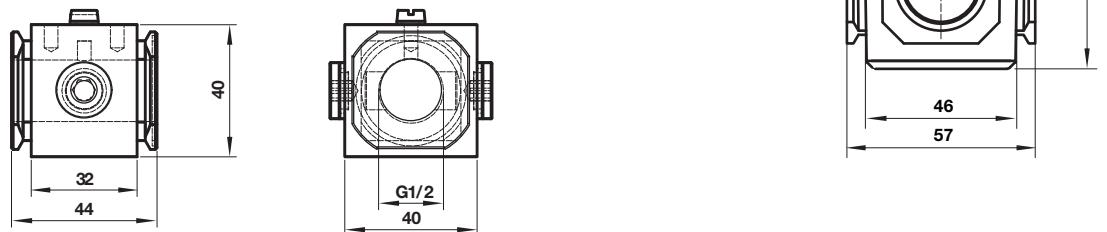


18D Porting block and 18D assembled

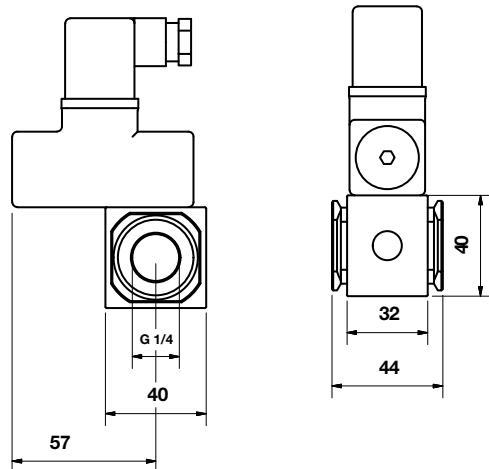


18D Pressure switch

Dimensions in mm
Projection/First angle

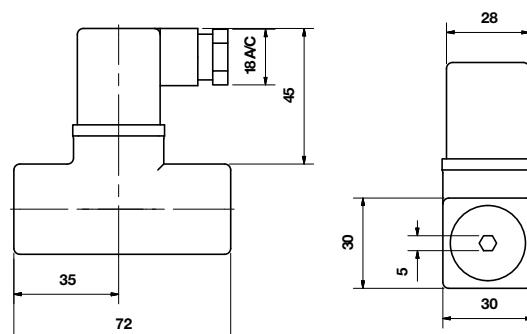

51D Pressure switch - digital

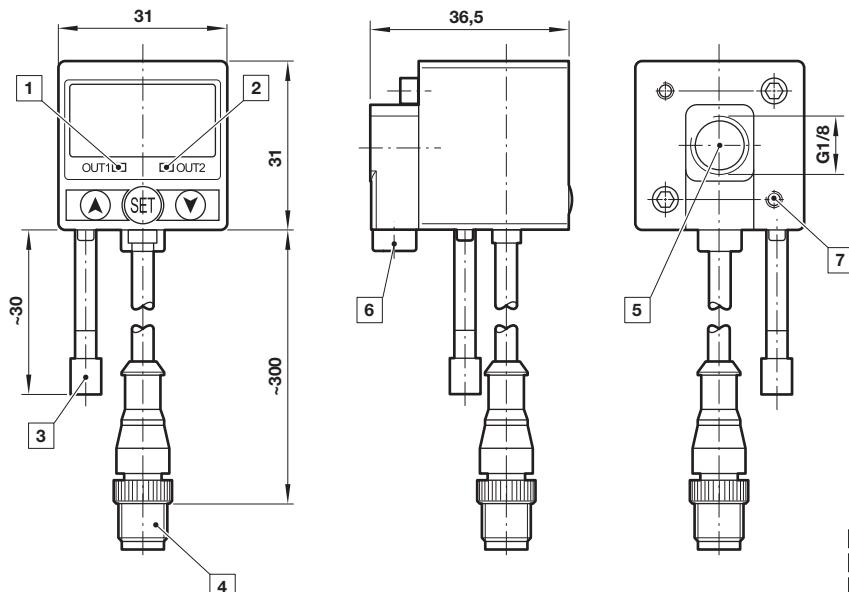

- ① Switch OUT 1, green LED
- ② Switch OUT 2, red LED
- ③ Dustproof protector
- ④ Connector M12 x 1
- ⑤ Inlet port
- ⑥ Alternative inlet port G1/8 plugged
- ⑦ Thread for mounting screw

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »**Technical features/data**«.

Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren Ltd.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.